

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://lamborghini.nt-rt.ru/> || hgc@nt-rt.ru




Jerez D

Instantaneous gas water heater, open flue, electronic ignition

- Hot water outlet: 11 Lt
- Gas type: LPG / NG
- Control: mechanic knobs
- Display: LCD
- Natural flue type
- Power and temperature selector
- LCD display to adjust temperature accurate
- Efficient combustion system
- Flue gas discharge control device
- Electronic ignition with flame detection by ionization
- Output regulation from 40% to 100%
- SOFT START device for progressive and silent ignition
- Safety device to protect against insufficient water pressure
- Also certified for operation on propane-air max gas (50% air - 50% G31)
- Startup with low water supply pressure
- Anti-freezing drain device / valve

Connections and dimensions (in mm)

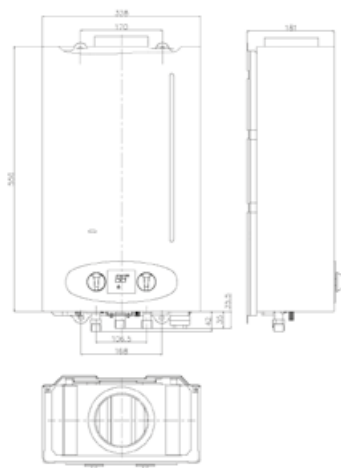

Technical data

MODEL		11 D
Gas type		NG / LPG
Input power rating	kW	22
Output power rating (thermal load)	kW	18.9
Thermal efficiency	%	74.5
Power supply	v/Hz	3 Phase / 230 Volt
Height x Width x Depth	mm	550 x 328 x 181
Net weight	kg	9
Hot water yield $\Delta t=25^{\circ}\text{C}$	kg/min	10.8
Water applicable pressure	bar	0.1-10
IP rating		IPX 5
Installation		Indoor wall mounted
Range of hot water regulation ($\pm 3^{\circ}\text{C}$)	$^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$
Minimum start-up flow	l/min	2.5
Gas rated pressure	pa	2800
Cold water inlet / Hot water outlet / Gas inlet	\emptyset	G 1/2" / G 1/2" / G 1/2"